


ELECTRICTOR  
3 Phase  
380V

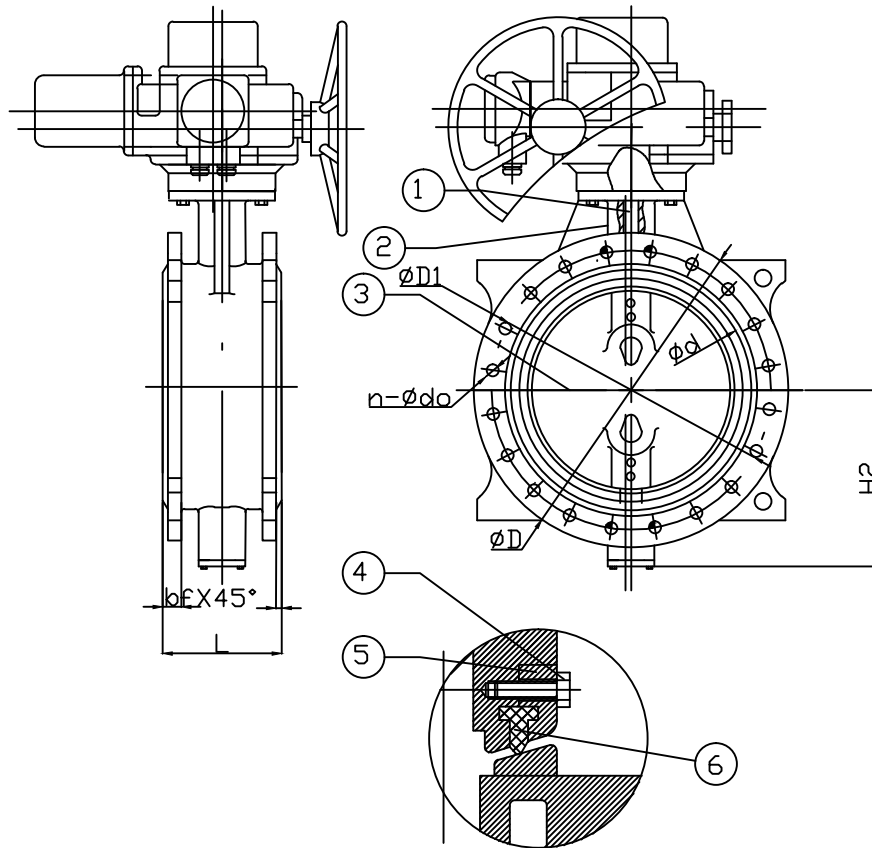

6	Rubber seat	EPDM
5	Retainer	CARBON STEEL
4	Bolts	CARBON STEEL
3	Disc	GGG40
2	Body	GGG40
1	Stem	SS410
No.	Name	Materials
TEST PRESSURE		SHELL
	HYDROSTATIC	24 Kg/cm <sup>2</sup>
	AIR	17.6 Kg/cm <sup>2</sup>
STAND-ARD	DESIGN CODE	ISO5752-14
	INSPECTION & TEST	DIN 3230 PART 3
	END STANDARD	BS 4504 PN16
	FACE TO FACE	DIN 3202 F4

4"	DN100	220	156	180	8-19	20	3	130	190	
6"	DN150	285	211	240	8-23	20	3	162	210	
8"	DN200	340	266	295	12-23	20	3	215	230	
10"	DN250	405	319	355	12-27	22	3	224	250	
12"	DN300	460	370	410	12-27	24	3	272	270	
14"	DN350	520	429	470	16-27	25	4	315	290	
16"	DN400	580	480	525	16-31	26	4	351	310	
18"	DN450	640	548	585	20-31	28	4	379	330	
20"	DN500	715	609	650	20-34	30	5	420	350	
24"	DN600	840	720	770	20-37	31	5	440	390	
28"	DN700	910	794	840	24-37	33	5	569	430	
32"	DN800	1025	901	950	24-40	36	5	570	470	
36"	DN900	1125	1001	1050	28-40	40	5	627	510	
40"	DN1000	1255	1116	1170	28-43	40	5	706	550	
48"	DN1200	1485	1330	1390	32-43	45	5	815	630	
SIZE		$\phi D$	$\phi d$	$\phi D1$		$n-\phi d0$	b	f	H2	L