
Foot Valves

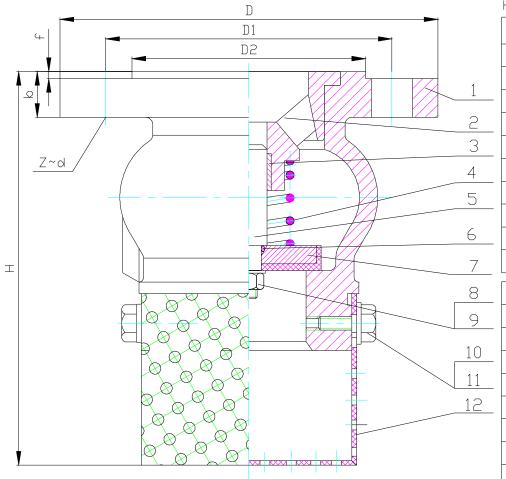

HT200 PN16

DN	D	D1	D2	Н	b	f	Z-d
Ø40	Ø150	Ø110	Ø84	148	18	3	4-Ø19
ø50	Ø165	Ø125	Ø99	166	20	3	4-ø19
Ø65	Ø185	Ø145	Ø118	201	20	3	4-ø19
Ø80	ø200	Ø160	ø132	221	22	3	8-ø19
Ø100	ø220	Ø180	Ø156	265	24	3	8-ø19
Ø125	ø250	Ø210	Ø184	300	26	3	8-Ø19
Ø150	ø285	Ø240	Ø211	360	26	3	8-ø23
ø200	Ø340	ø295	Ø266	470	30	3	12-ø23
ø250	Ø405	ø355	ø319	568	32	3	12-ø28
ø300	Ø460	Ø410	Ø370	653	32	4	12-ø28

Nο	PART NAME	MATERIAL	STANDARD
1	B□DY	CAST IRON	GG25
2	BONNET	CAST IRON	GG25
3	BUSH	BRASS	
4	SPRING	65Mn	
5	GUIDING STEM	STAINLESS STEEL	2CR13
6	□-RING	NBR	
7	DISC	DUCTILE IRON/NBR	GG25
8	NUT	CARBON STEEL	A3
9	WASHER	CARBON STEEL	A3
10	NUT	CARBON STEEL	А3
11	WASHER	CARBON STEEL	A3
12	SLEVE	STAINLESS STEEL	\$\$304
	1 2 3 4 5 6 7 8 9 10	1 BODY 2 BONNET 3 BUSH 4 SPRING 5 GUIDING STEM 6 O-RING 7 DISC 8 NUT 9 WASHER 10 NUT 11 WASHER	1 BODY CAST IRON 2 BONNET CAST IRON 3 BUSH BRASS 4 SPRING 65Mn 5 GUIDING STEM STAINLESS STEEL 6 O-RING NBR 7 DISC DUCTILE IRON/NBR 8 NUT CARBON STEEL 9 WASHER CARBON STEEL 10 NUT CARBON STEEL 11 WASHER CARBON STEEL